

2400-2485MHz - 10dBi OMNI Directional Antenna

EZ-OM24V10INF

The new **OM24V10INF** OMNI Directional Antenna is made from sealed UV Stabilized Fiberglass with steel base and is available with an integrated N Female Connector.

The gain of this antenna is 10dBi and comes with 11° of Vertical BeamWidth.

The antenna is supplied with steel mounting bracket and hardware for 1" to 2" OD pole.

The **OM24V10INF** comes standard with integrated N Female bulkhead connector with heavy duty nuts for alternate mounting methods such as standoff mounting, thru-roof mounting, etc.

The OM24V10INF is ideally suited for MultiPoint applications where wide coverage is desired.




Features :


- Superior performance.
- Heavy-duty steel mounting brackets.

TECHNICAL SPECIFICATIONS

Frequency	2400-2485MHz
Gain	10dBi
Polarization	Vertical
Vertical BeamWidth	11°
Horizontal BeamWidth	360°
Impedance	50 Ohm
Max. Input Power	50 Watts
VSWR	<1.5:1 avg.
Weight	1.1 Kgr
Length	1000mm
Diameter	19mm
Radome Material	Grey Fiberglass
Mounting	25mm to 50mm
Rated Wind Velocity	58m/s

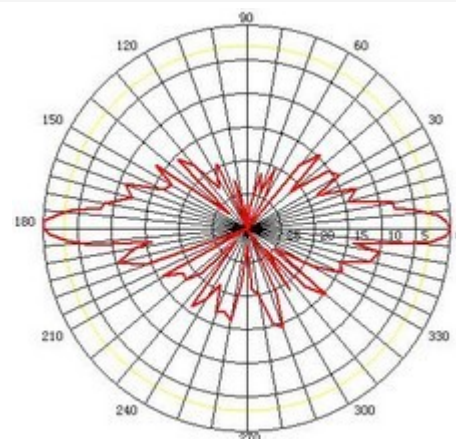

E-Plane

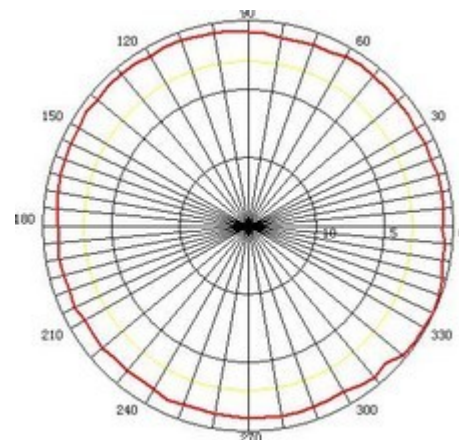

H-Plane