

# RP-TNC Plug to N-Type Female Bulkhead 25cm


## EZ-RPTNCP2NB25

### RP-TNC Plug to N-Type Female Bulkhead 25cm.

RP-TNC to N-Type Series coaxial pigtails have medium-sized, threaded coupling connectors designed for use from DC to 11 GHz.

Their consistently low broadband VSWR have made them popular over the years in many applications.

The RP-TNC to N-Type series pigtail is impedance matched to 50 ohm cables.

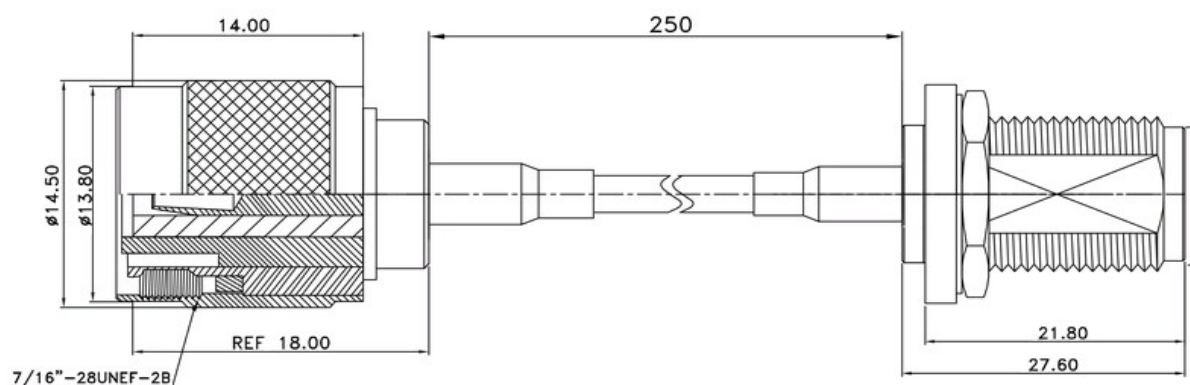

### TECHNICAL SPECIFICATIONS

Impedance	50 ohm
Frequency Range	0 to 11.0 GHz
V.S.W.R.	1.3 max
Working Voltage	1,000 volts rms max at sea level
Dielectric Withstanding Voltage	2,500 volts rms max at sea level
Contact Resistance	Center contact=1.0 Milliohms max
Contact Resistance	Outer contact=1.0 Milliohms max
Insertion Loss	< 2,5 dB
Insulation Resistance	5,000 Megohms min
Connector Body (RP-TNC/N-Type)	(Nickel/Nickel) Plated
Center Pin	Gold Plated
Dielectric	Teflon
O-Ring	Present
Cable Type	LMR100

### Connector 1

RP-TNC



Female Thread  
Female Center Pin

### Connector 2

N-Type



Male Thread  
Female Center Pin

### Additional Images

