

MCX Male Crimp LMR-100, RG-174, RG-316


EZ-MCXMC100

MCX Male Crimp 100, RG-174, RG-316 series cable.

MCX coaxial connectors are medium-sized, coupling connectors designed for use from DC to 11 GHz.

Their consistently low broadband VSWR have made them popular over the years in many applications.

The MCX series connector is impedance matched to 50 ohm cables.

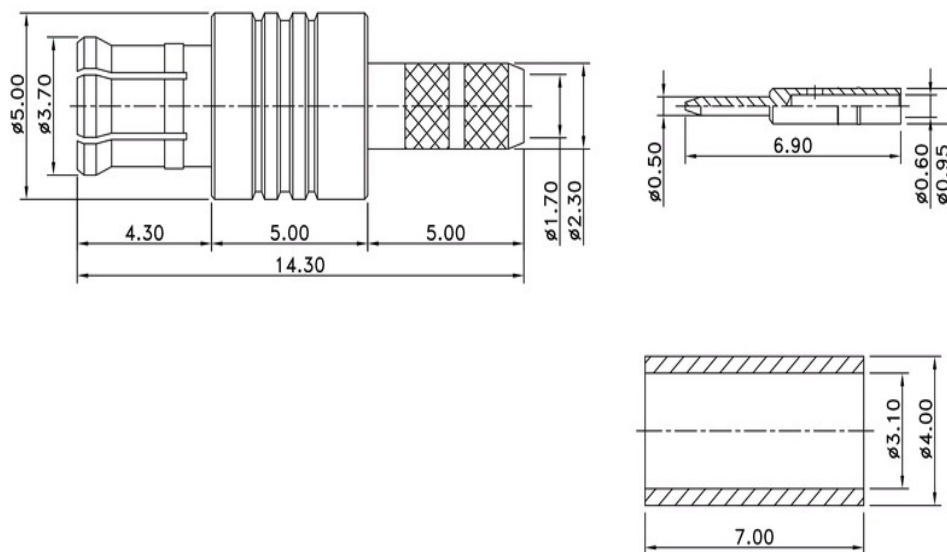

TECHNICAL SPECIFICATIONS

Impedance	50 ohm
Frequency Range	0 to 11.0 GHz
V.S.W.R.	1.3 max
Working Voltage	1,000 volts rms max at sea level
Dielectric Withstanding Voltage	2,500 volts rms max at sea level
Contact Resistance	Center contact=1.0 Milliohms max
Contact Resistance	Outer contact=1.0 Milliohms max
Insertion Loss	0.3 dB max at 10 GHz
Insulation Resistance	5,000 Megohms min
Body Plating	Gold
Center Pin Plating	Gold
Crimp Tube Plating	Gold
Dielectric	Teflon

Connector

MCX



Male Body

Male Center Pin

Additional Images

