

# U.FL/MHF to N-Type Reverse Polarity Bulkhead 25cm


## EZ-UFL2RPNB25

### U.FL/MHF to N-Type Reverse Polarity Bulkhead 25cm.

UFL to N-Type Reverse Polarity series coaxial pigtailed have medium-sized, threaded coupling connectors designed for use from DC to 11 GHz.

Their consistently low broadband VSWR have made them popular over the years in many applications.

The UFL to N-Type Reverse Polarity series pigtail is impedance matched to 50 ohm cables.

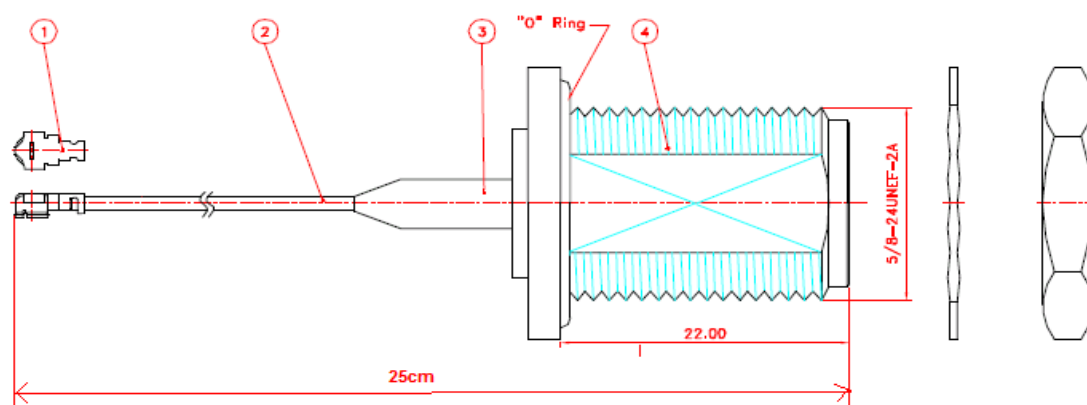

### TECHNICAL SPECIFICATIONS

Impedance	50 ohm
Frequency Range	0 to 11.0 GHz
V.S.W.R.	1.3 max
Working Voltage	1,000 volts rms max at sea level
Dielectric Withstanding Voltage	2,500 volts rms max at sea level
Contact Resistance	Center contact=1.0 Milliohms max
Contact Resistance	Outer contact=1.0 Milliohms max
Insertion Loss	< 2,5 dB
Insulation Resistance	5,000 Megohms min
Connector Body (UFL/RP N-Type)	(Gold /Nickel) Plated
Center Pin	Gold Plated
Dielectric	Teflon
O-Ring	Present
Cable Type	RG178

### Connector 1

UFL



Female Body

Female Center Pin

### Connector 2

RP N-Type



Male Thread

Male Center Pin

### Additional Images

